

FEATURES

1. Highly reliable capacitors that withstand low ESR .
2. Two or three dimensions with same ratings.
3. Aluminum case designed explosion-proof vent.
4. Best for switching power supplies

SPECIFICATIONS

Item	Performance Characteristics													
Operating Temperature Range	-40 to +105°C													
Rated Working voltage Range	10 to 450V DC													
Nominal Capacitance Range	47~47000(uF)													
Capacitance Tolerance	± 20% (120Hz, +20°C)													
Leakage Current	$I \leq 3\sqrt{CV}$ after 5 minutes application of rated working voltage at +20°C													
Dissipation Factor $\tan \delta$ (120Hz+20°C)	Working voltage(V)	10~16	25	35~50	63	80	100	160~200	250	315~450				
	$\tan \delta$ (max.)	0.50	0.30	0.25	0.20	0.15	0.15	0.15	0.15	0.25				
Low Temperature characteristics	Impedance ratio max. at 120Hz													
	Working voltage(V)	10	16	25	35	50	63	80	100	160	200	250	400	450
	Z-25°C/Z+20°C	6	6	6	6	4	3	3	3	8	8	8	8	8
Z-40°C/Z+20°C	15	15	15	10	8	6	6	6	8	8	8	8	8	
High temperature Loading	Test conditions After 2000 hours application of rated voltage at +105°C the capacitor shall meet the following limits													
	Post test requirements at +20°C Leakage current : ≤ Initial specified value Capacitance change : ≤ ±20% of initial measured value $\tan \delta$: ≤ 200% of initial specified value													
Shelf life	At 105°C no voltage applied after 1000hours the capacitors shall meet the following limits													
	Post test requirements at+20°C Leakage current : ≤ 200 of Initial specified value Capacitance change : ≤ ± 15% of initial measured value $\tan \delta$: ≤ 150% of initial specified value													
Others	JIS C-5141 JIS C-5102													

Ripple current MULTIPLIERS

1)Maximum rms ripple current at 120Hz,105°C are given in the table

2)Temperature multiplying factor: Where capacitors are operated at


temperature other than 105°C,the maximum ripple current must be

multiplied by the figure shown in the table below.

Temperature coefficient

Temperature (°C)	20~45	65	75	105
Factor	1	0.91	0.73	0.36

3) Frequency multiplying factor:

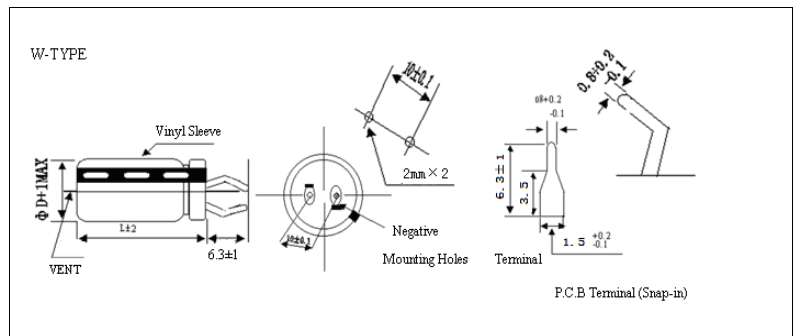




Large Can Aluminum Electrolytic Capacitors

If capacitor are used to filter circuits at a frequency other than 120 Hz, the maximum ripple current must be multiplied by the figure shown in the table below.
Frequency coefficient

Frequency(Hz)	60	120	1k	10~50k
10~100V	0.9	1.0	1.15	1.25
160~250V	0.8	1.0	1.25	1.47
350~450V	0.8	1.0	1.30	1.47

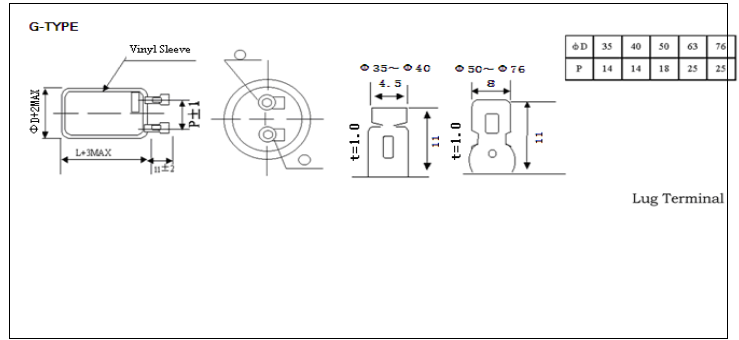

DIMENSIONS

WV(SV) Cap.(uF) Code φ D		Φ D x L(mm)											
		10(13)											
		22			25			30			35		
Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z		
5600	568	22x25	1.11	125									
6800	688	22x25	1.31	125	25x25	1.10	88						
8200	828	22x25	1.57	125	25x25	1.57	88						
10000	109	22x30	1.60	97	25x25	1.60	88	30x25	1.61	75			
12000	129	22x35	1.81	81	25x30	1.801	77	30x25	1.80	75			
15000	159	22x35	2.10	81	25x30	2.10	69	30x25	2.10	75			
18000	189	22x35	2.21	81	25x30	2.21	68	30x30	2.21	66			
22000	229	22x40	2.76	69	25x35	2.76	63	30x30	2.76	49	35x25	2.76	69
27000	279				25x50	3.05	42	30x40	3.05	31	35x30	3.05	47
33000	339				25x50	3.41	42	30x40	3.01	31	35x35	3.41	37
39000	399							30x50	3.61	28	35x40	3.61	32
47000	479							30x50	4.61	28	35x50	4.61	26

WV(SV) Cap.(uF) Code φ D		16(20)											
		22			25			30			35		
		Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z
5600	568	22x25	1.41	126									
6800	688	22x30	1.61	98	25x25	1.61	89						
8200	828	22x35	1.80	82	25x30	1.80	74						
10000	109	22x40	2.10	68	25x30	2.10	68	30x25	2.10	75			
12000	129	22x40	2.41	68	25x35	2.41	53	30x25	2.41	75			
15000	159	22x50	2.70	53	25x40	2.70	52	30x30	2.70	48			
18000	189				25x50	3.05	42	30x35	3.05	36	35x30	3.05	47
22000	229				25x50	3.40	42	30x40	3.40	30	35x45	3.40	37
27000	279							30x50	4.03	28	35x40	4.03	32
33000	339							30x50	4.33	28	35x40	4.33	32
39000	399										35x50	4.94	26

WV(SV) Cap.(uF) Code φ D		25(32)											
		22			25			30			35		
		Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z
3900	398	22x25	1.30	125									
4700	478	22x30	1.50	99	25x25	1.50	89						
5600	568	22x35	1.60	83	25x25	1.60	88						
6800	688	22x40	1.87	68	25x30	1.87	68	30x25	1.87	76			
8200	828	22x45	2.20	63	25x35	2.20	63	30x30	2.20	48	35x25	2.20	68
10000	109	22x50	2.35	42	25x40	2.35	53	30x35	2.35	37	35x30	2.35	60
12000	129				25x50	2.72	42	30x35	2.72	37	35x30	2.72	47
15000	159							30x40	3.16	30	35x35	3.16	37
18000	189							30x50	3.60	28	35x40	3.60	32



Large Can Aluminum Electrolytic Capacitors

22000	229										35×45	3.80	30
27000	279										35×50	4.61	26

WV(SV) Cap.(uF) Code φ D		35(44)											
		22			25			30			35		
		Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z
2200	228	22×25	1.11	125									
2700	278	22×25	1.30	125									
3300	338	22×30	1.41	98	25×25	1.41	88						
3900	398	22×35	1.54	81	25×30	1.54	68						
4700	478	22×40	1.76	68	25×30	1.76	68	30×25	1.76	75			
5600	568	22×45	1.94	62	25×35	1.94	62	30×30	1.94	48	35×25	1.94	68
6800	688	22×50	2.21	52	25×40	2.21	52	30×35	2.21	36	35×30	2.21	60
8200	828				25×50	2.51	40	30×35	2.51	35	35×30	2.51	47
10000	109							30×40	2.80	30	35×35	2.80	37
12000	129							30×50	3.30	28	35×40	3.30	30
15000	159										35×50	4.26	25

Allowable Ripple (A rms)at 105°C 120Hz
Max Impedance (Z m Ω) at 20°C 30KHZ

DIMENSIONS

WV(SV) Cap.(uF) Code φ D		50(63)											
		22			25			30			35		
		Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z
1500	158	22×25	1.01	125									
1800	188	22×30	1.11	99	25×25	1.11	88						
2200	228	22×35	1.30	83	25×25	1.30	88						
2700	278	22×40	1.46	68	25×30	1.46	68	30×25	1.46	75			
3300	338	22×40	1.70	68	25×35	1.70	62	30×30	1.70	48			
3900	398	22×50	1.90	52	25×40	1.90	52	30×35	1.90	36			
4700	478				25×40	2.11	51	30×35	2.11	35	35×30	2.11	48
5600	568				25×50	2.36	42	30×40	2.36	30	35×35	2.36	38
6800	688							30×50	2.70	28	35×40	2.70	32
8200	828							30×50	3.15	28	35×40	3.15	32
10000	109										35×50	3.51	25

WV(SV) Cap.(uF) Code φ D		63(79)											
		22			25			30			35		
		Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z
1000	108	22×25	1.01	126									
1200	128	22×25	1.15	126	25×25	1.15	88						
1500	158	22×35	1.31	83	25×30	1.31	68						
1800	188	22×41	1.45	68	25×30	1.45	68	30×25	1.45	75			
2200	228	22×45	1.65	63	25×35	1.65	63	30×30	1.65	48	35×25	1.65	68
2700	278	22×50	1.91	54	25×40	1.91	52	30×35	1.91	35	35×30	1.91	60
3300	338				25×50	2.16	42	30×35	2.16	35	35×30	2.16	48
3900	398							30×40	2.40	30	35×35	2.40	38
4700	478							30×50	2.70	28	35×40	2.70	32
5600	568							30×50	3.10	28	35×40	3.10	32
6800	688										35×50	3.50	25

WV(SV) Cap.(uF) Code φ D		80(100)											
		22			25			30			35		
		Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z
680	687	22×25	0.96	148									
820	827	22×30	1.01	118									
1000	108	22×35	1.21	98	25×25	1.21	116						
1200	128	22×40	1.40	78	25×30	1.40	81						
1500	158	22×45	1.60	48	25×35	1.60	66	30×25	1.60	82			
1800	188	22×50	1.81	58	25×40	1.81	62	30×30	1.81	58	35×25	1.81	68



Large Can Aluminum Electrolytic Capacitors

2200	228				25×50	2.05	44	30×35	2.05	52	35×30	2.05	48
2700	278							30×40	2.36	42	35×36	2.35	42
3300	338							30×50	2.70	28	35×40	2.70	28
3900	398										35×45	2.80	25
4700	478										35×50	3.40	22

WV(SV)		100(125)												
Cap.(uF)	Code	φ D	22			25			30			35		
			Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z
560	567		22×30	0.96	118	25×25	0.95	116						
680	687		22×35	1.11	98	25×30	1.10	80						
820	827		22×40	1.40	78	25×30	1.40	80	30×25	1.40	82			
1000	108		22×45	1.41	76	25×35	1.41	66	30×30	1.41	58	35×25	1.41	68
1200	128		22×50	1.60	58	25×40	1.60	62	30×35	1.60	52	35×30	1.60	66
1500	158					25×50	1.86	44	30×40	1.86	42	35×30	1.86	48
1800	188								30×45	2.06	38	35×35	2.06	42
2200	228								30×50	2.40	28	35×40	2.40	28
2700	278											35×50	2.80	23

Allowable Ripple (A rms) at 105°C 120Hz
Max Impedance (Z mΩ) at 20°C 30KHZ

DIMENSIONS

WV(SV)		160(200)												ΦD×L(mm)	
Cap.(uF)	Code	φ D	22			25			30			35			
			Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z	
270	277		22×30	0.61	566										
330	337		22×35	0.80	456	25×25	0.80	526							
390	397		22×35	0.86	456	25×30	0.86	416							
470	477		22×45	1.10	380	25×35	1.10	366	30×30	1.10	316				
560	567		22×45	1.15	380	25×35	1.15	300	30×30	1.15	316				
680	687					25×45	1.30	280	30×35	1.30	262				
820	827					25×45	1.44	280	30×40	1.44	346	35×30	1.44	256	
1000	108								30×45	1.70	300	35×35	1.70	206	
1200	128											35×45	1.95	166	
1500	158											35×50	2.40	146	

WV(SV)		200(250)													
Cap.(uF)	Code	φ D	22			25			30			35			
			Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z	
180	187		22×25	0.58	640										
220	227		22×30	0.66	560										
270	277		22×35	0.78	450	25×25	0.78	520							
330	337		22×40	0.90	400	25×30	0.90	410							
390	397		22×40	0.98	400	25×35	0.98	400	30×25	0.98	400				
470	477		22×40	1.16	400	25×35	1.16	400	30×25	1.16	400				
560	567		22×45	1.30	340	25×35	1.30	360	30×25	1.30	400				
680	687		22×50	1.46	310	25×40	1.46	310	30×30	1.46	310	35×25	1.46	340	
820	827					25×45	1.60	300	30×35	1.60	360	35×35	1.60	280	
1000	108					25×55	1.90	230	30×45	1.90	300	35×35	1.90	200	
1200	128								30×50	2.10	172	35×40	2.10	172	

WV(SV)		250(300)													
Cap.(uF)	Code	φ D	22			25			30			35			
			Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z	
150	157		22×25	0.51	640										
180	187		22×30	0.65	560	25×25	0.65	520							
220	227		22×35	0.76	450	25×30	0.76	410							
270	277		22×40	0.85	400	25×30	0.85	410	30×25	0.85	400				
330	337		22×45	1.00	380	25×35	1.00	360	30×30	1.00	310	35×25	1.00	340	
390	397		22×50	1.11	310	25×40	1.11	300	30×35	1.11	260				



Large Can Aluminum Electrolytic Capacitors

470	477				25×50	1.20	230	30×35	1.20	260	35×30	1.20	250
560	567							30×40	1.35	245	35×35	1.35	205
680	687							30×50	1.55	175	35×40	1.55	175
820	827							30×55	1.70	150			
1000	108										35×50	2.00	145

WV(SV)		350(400)												
Cap.(uF)	Code	φ D	22			25			30			35		
			Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z
68	686		22×25	0.35	790									
82	826		22×30	0.40	700									
100	107		22×35	0.50	560	25×25	0.50	650						
120	127		22×40	0.55	500	25×30	0.55	520	30×25	0.55	490			
150	157		22×45	0.64	460	25×35	0.64	430	30×30	0.64	390			
180	187		22×50	0.70	380	25×40	0.70	370	30×30	0.70	390			
220	227					25×50	0.82	300	30×35	0.82	320	35×30	0.82	310
270	277								30×40	0.90	280	35×35	0.90	250
330	337								30×50	1.10	210	35×40	1.10	220
390	397											35×45	1.20	210
470	477											35×50	1.30	170

Allowable Ripple (A rms)at 105°C 120Hz
Max Impedance (Z mΩ)at 20°C 30KHZ

DIMENSIONS

Φ D×L(mm)

WV(SV)		400(450)												
Cap.(uF)	Code	φ D	22			25			30			35		
			Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z
56	566		22×25	0.33	795									
68	686		22×30	0.41	700	25×25	0.41	655						
82	826		22×35	0.46	560	25×30	0.46	522						
100	107		22×40	0.50	500	25×30	0.50	522	30×25	0.50	490			
120	127		22×40	0.55	500	25×35	0.55	430	30×30	0.55	390			
150	157		22×50	0.65	380	25×40	0.65	370	30×35	0.65	320			
180	187					25×45	0.75	350	30×35	0.75	320	35×30	0.75	310
220	227					25×50	0.85	300	30×40	0.85	280	35×35	0.85	250
270	277								30×50	1.05	210	35×40	1.05	220
330	337											35×45	1.10	210
390	397											35×50	1.20	175

WV(SV)		450(500)												
Cap.(uF)	Code	φ D	22			25			30			35		
			Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z
47	476		22×30	0.45	845									
68	686		22×40	0.58	582	25×30	0.58	582						
100	107		22×45	0.71	391	25×35	0.71	400						
120	127		22×50	0.80	332	25×40	0.80	342						
150	157					25×45	0.95	271	30×35	0.96	262			
180	187								30×40	1.11	220			
220	227								30×45	1.31	182	35×40	1.31	185
270	277								30×50	1.41	150	35×45	1.51	152
330	337											35×50	1.72	122
390	397											35×55	1.80	105

Allowable Ripple (A rms)at 105°C 120Hz
Max Impedance (Z mΩ)at 20°C 30KHZ