



## Screw Terminal Type

Series

CWR

### FEATURES

1. Small case size, high rated voltage, capacitance and ripple current, stable and reliable performance, forming Complete sets of unclar electric station.
2. Suit for use in electronic and industrial equipments such as computer, programming control exchanger for Power supplies filtering and energy stargazing.


### SPECIFICATIONS

Item	Performance Characteristics										
Operating Temperature Range	-40 to +85°C					-25 to 85°C					
Rated Working voltage Range	16 to 100V					160 to 450V DC					
Nominal Capacitance Range	470~470000(uF)										
Capacitance Tolerance	-20%~+20% (120Hz, +20°C)										
Leakage Current	$I \leq 3 \sqrt{CV}$ or 5(mA) after 5 minutes application of rated working voltage at +20°C, Which is smaller										
Dissipation Factor $\tan \delta$  (120Hz+20°C)	Working voltage(V) Dimension $\phi$	16	25	35	50	63	80	100	160~250	350~450	
	35	0.7	0.45	0.45	0.3	0.25	0.25	0.2	0.15	0.25	
	51	1.0	0.6	0.6	0.45	0.35	0.3	0.2	0.15	0.25	
	63.5	1.3	0.8	0.7	0.5	0.4	0.35	0.25	0.2	0.25	
	76.2	2.0	1.2	0.9	0.7	0.5	0.4	0.25	0.25	0.25	
	90	-	-	-	-	-	-	-	0.25	0.25	
Low Temperature characteristics	Impedance ratio max. at 120Hz										
	Working voltage(V)	16~100				160~450					
	Z-25°C/Z+20°C	-				8					
	Z-40°C/Z+20°C	12				-					
Frequency coefficient	Frequency(Hz)	60	120	360	1k	10k~					
	16~100V	0.90	1.00	1.08	1.15	1.15					
	160~250V	0.88	1.00	1.08	1.15	1.20					
	350~400V	0.82	1.00	1.20	1.35	1.40					
	Test conditions The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2000 hours at 85°C Post test requirements at +20°C Leakage current : $\leq$ Initial specified value Capacitance change : $\leq \pm 15\%$ of initial measured value $\tan \delta$ : $\leq 175\%$ of initial specified value										
Shelf life	At 85°C no voltage applied after 1000hours the capacitors shall meet the following limite										
	Post test requirements at+20°C										
	Leakage current	: $\leq$ of Initial specified value									
	Capacitance change	: $\leq \pm 15\%$ of initial measured value									
Tan $\delta$	: $\leq 175\%$ of initial specified value										
Others	JIS C-5141 JIS C-5102										



# Screw Terminal Type

## CASE SIZE TABLE

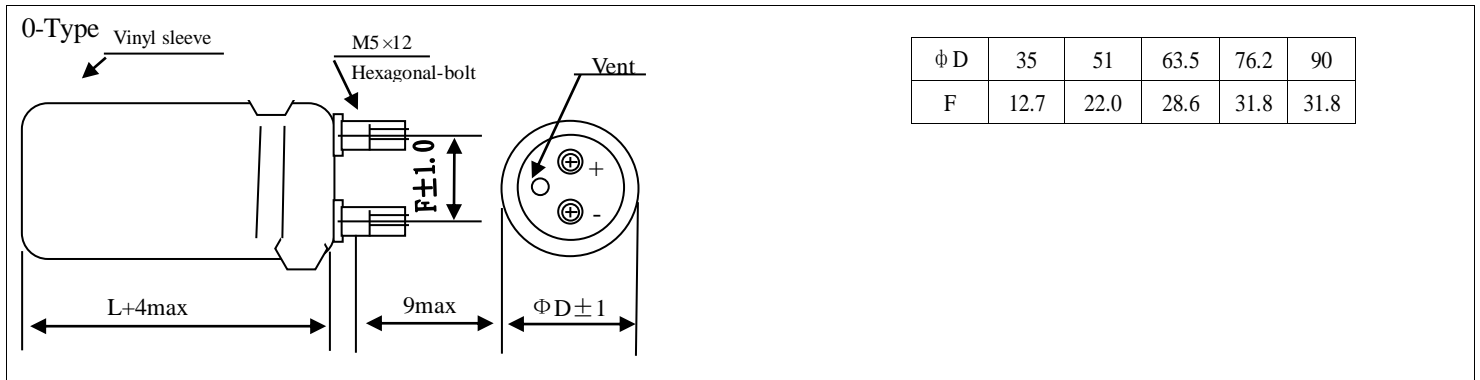

## DIMENSIONS

Φ D × L (mm)

Voltage Cap.(uF) Code SV	16V(1C)		25V(1E)		35V(1V)		50V(1H)		63V(1J)	
	20		32		44		63		79	
10000 109									35×80	4.1
15000 159							35×80	5.4	35×100	5.5
22000 229							35×100	6.1	35×120	7.1
33000 339			35×80	6.0	35×80	6.2	51×70	7.0	51×80	8.8
47000 479	35×80	6.4	35×100	8.2	35×120	8.2	51×90	8.6	51×120	11.7
68000 689	35×100	7.9	35×120	9.4	35×80	9.3	51×100	11.0	63.5×100	15.0
100000 10T	35×120	10.6	51×100	12.0	51×100	13.6	63.5×100	14.2	63.5×140	20.8
150000 15T	51×100	11.5	51×120	15.3	63.5×100	14.5	76.2×120	18.6	76.2×140	26.0
220000 22T	51×120	15.6	63.5×100	18.9	76.2×100	16.8				
330000 33T	63.5×100	21.1	76.2×120	23.2	76.2×140	24.8				
470000 47T	76.2×120	30.5							Case Size	Allowable ripple

Allowable Ripple (A rms) at 85°C 120Hz

Voltage Cap.(uF) Code SV	80V(1K)		100V(2A)		160V(2C)		200V(2D)		250V(2E)	
	100		125		200		250		300	
1000 108									35×80	2.4
1500 158							35×80	2.9	35×100	3.0
2200 228					35×80	3.2	35×100	3.5	51×80	4.0
3300 338					35×120	4.7	51×80	4.8	51×100	5.4
4700 478			35×80	3.8	51×80	5.0	51×100	6.3	63.5×100	7.3
6800 688			35×100	4.5	51×100	6.4	51×140	7.3	63.5×120	8.9
10000 109	35×80	4.2	35×120	5.3	63.5×100	9.1	63.5×120	9.8	76.2×120	11.8
15000 159	35×120	6.0	51×80	6.0	76.2×100	12.0	76.2×120	13.0	90×140	16.4
22000 229	51×80	6.5	51×100	6.8	76.2×140	16.9	90×140	15.9		
33000 339	51×120	9.2	51×140	4.0	90×140	19.2				
47000 479	63.5×100	12.7	63.5×140	14.4						
68000 689	63.5×140	15.5	90×140	18.2						
100000 10T	76.2×140	21.3							Case Size	Allowable ripple

Allowable Ripple (A rms) at 85°C 120Hz

Voltage Cap.(uF) Code SV	350V(2V)		400V(2G)		450V(2W)	
	400		450		500	
470 477			35×80	2.0	35×80	2.1
680 687	35×80	2.5	35×100	2.6	35×120	2.9
1000 108	51×60	3.3	51×70	3.3	51×80	3.6
1200 128	51×70	3.6	51×80	4.2	51×100	4.2
1500 158	51×80	4.5	51×100	4.8	51×110	5.1
1800 188	35×90	5.1	51×110	5.4	63.5×110	6.6



### *Screw Terminal Type*

2200	228	35×110	6.0	51×130	6.3	63.5×130	7.5
2700	278	51×130	6.9	63.5×100	7.2	63.5×140	8.4
3300	338	63.5×100	8.1	63.5×130	8.4	76.2×140	9.6
4700	478	76.2×100	9.6	76.2×130	10.5	76.2×150	13.2
5600	568	76.2×140	11.4	76.2×150	12.3	76.2×150	14.4
6800	688	76.2×130	13.5	76.2×150	13.5	90×150	15.9
8200	828	76.2×150	15.0	90×150	15.9	90×190	17.5
10000	109	90×150	16.8	90×150	17.7		
12000	129	90×150	18.4	90×190	20.7		
15000	159	90×190	22.8			Case Size	Allowable ripple

Allowable Ripple (A rms)at 85°C 120Hz